



INSTRUMENT APPROACH CHART - ICAO PLAN VIEW SCALE: 1:400 000

ATIS: 135.900	AD ELEV: 25			BRØNNØYSUND BRØNNØY GLS RWY 03 TRANSITION ALTITUDE 7000
APP: 127.900	THR ELEV: 14	DIST IN NM		
AFIS: 119.600	HGT RELATED TO THR RWY 03	ELEV, ALT AND HGT IN FT		
VDF: 119.600	CIRCLING HGT RELATED TO AD ELEV			
BEARINGS ARE MAGNETIC - VAR 3.6 ° E (2015)				

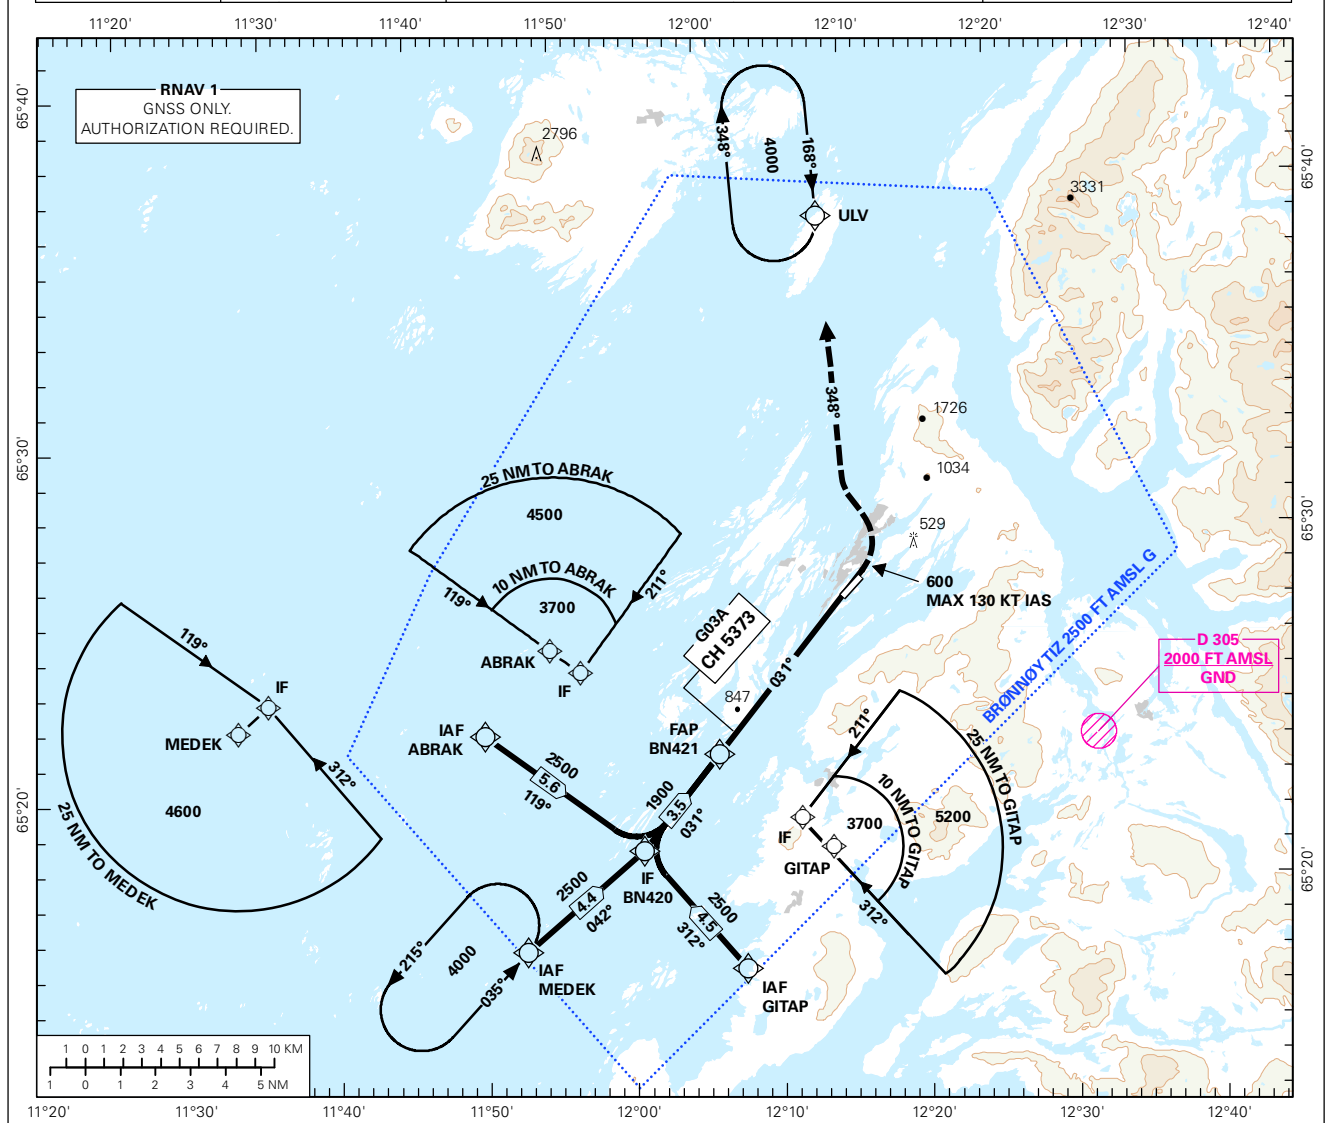

DIST TO THR	9	8	7	6	5	4	3	2
ALT (HGT)	-	-	-	-	1680 (1666)	1360 (1346)	1030 (1016)	710 (696)

PROCEDURE OFFSET: 3.7°

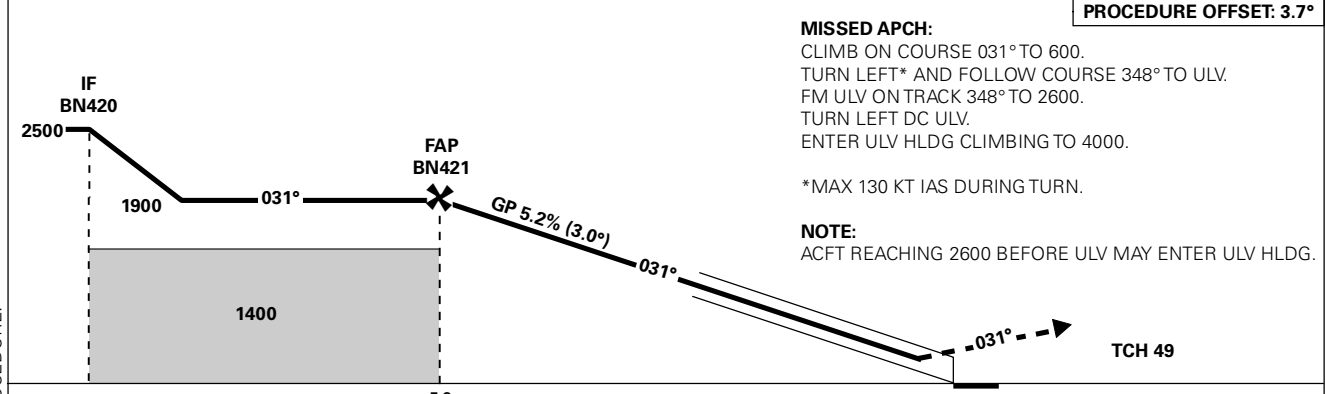

CAT OF ACFT	A	B	C	D	FINAL APCH	DIST FAP - THR: 5.8						
	2.5%*	403 (389)	412 (398)	-		-	SPEED	KT	70	90	100	120
SCAT-I	4.0%*	260 (246)	-	-	-	TIME	MIN:SEC	-	-	-	-	-
CIRCLING		470 (445)	740 (715)	-	-	ROD	FT/MIN	370	480	530	635	690

NOTE: CIRCLING W OF AD ONLY. *MNM MISSED APCH CLIMB GRADIENT.

CHANGES: NEW PROCEDURE.

SCAT-I: Special CAT-I, REF AIP Norge, GEN 1.5 and AD 1.1 paragraf 6.3

Det kreves spesiell godkjenning fra Luftfartstilsynet for å kunne bruke SCAT-I prosedyrer operativt.

Beslutningshøyder (DH) under 400 FT skal ikke brukes.

GLS VHF-data sendes på FREQ 114.050 MHZ

Under planlegging av en GLS presisjonsinnflyging skal piloter kontrollere at prosedyren vil være tilgjengelig. Mangel på GPS-signal og feil ved bakkestasjonen vil bli publisert ved bruk av NOTAM. Tekst som benyttes ved varslet mangelfull GNSS-dekning vil være "SCAT-I GPS OUTAGE PREDICTED".

Meldepunkt-kordinater er publisert i ENR 4.4

SCAT-I: Special CAT-I, REF AIP Norway, GEN 1.5 and AD 1.1 paragraph 6.3

Special authorization from the Norwegian Civil Aviation Authority is required prior to operational use of SCAT-I procedures.

Decision heights (DH) below 400 FT shall not be used.

GLS VHF data is transmitted on FREQ 114.050 MHZ.

When planning a GLS precision approach pilots shall check the availability of the instrument approach procedure. Predicted GPS outages and ground station irregularities will be published using NOTAM. Text used when insufficient GNSS coverage has been predicted will be "SCAT-I GPS OUTAGE PREDICTED".

Waypoint coordinates are published in ENR 4.4