



INSTRUMENT APPROACH CHART - ICAO PLAN VIEW SCALE: 1:350 000




AFIS: 119.300	AD ELEV: 1633		
VDF: 119.300	THR ELEV: 1616	DIST IN NM	
HGT RELATED TO THR RWY 06		ELEV, ALT AND HGT IN FT	
CIRCLING HGT RELATED TO AD ELEV			
BEARINGS ARE MAGNETIC - VAR 1.1 ° E (2015)			

SOGNDAL
HAUKÅSEN
LOC RWY 06
TRANSITION ALTITUDE
7000

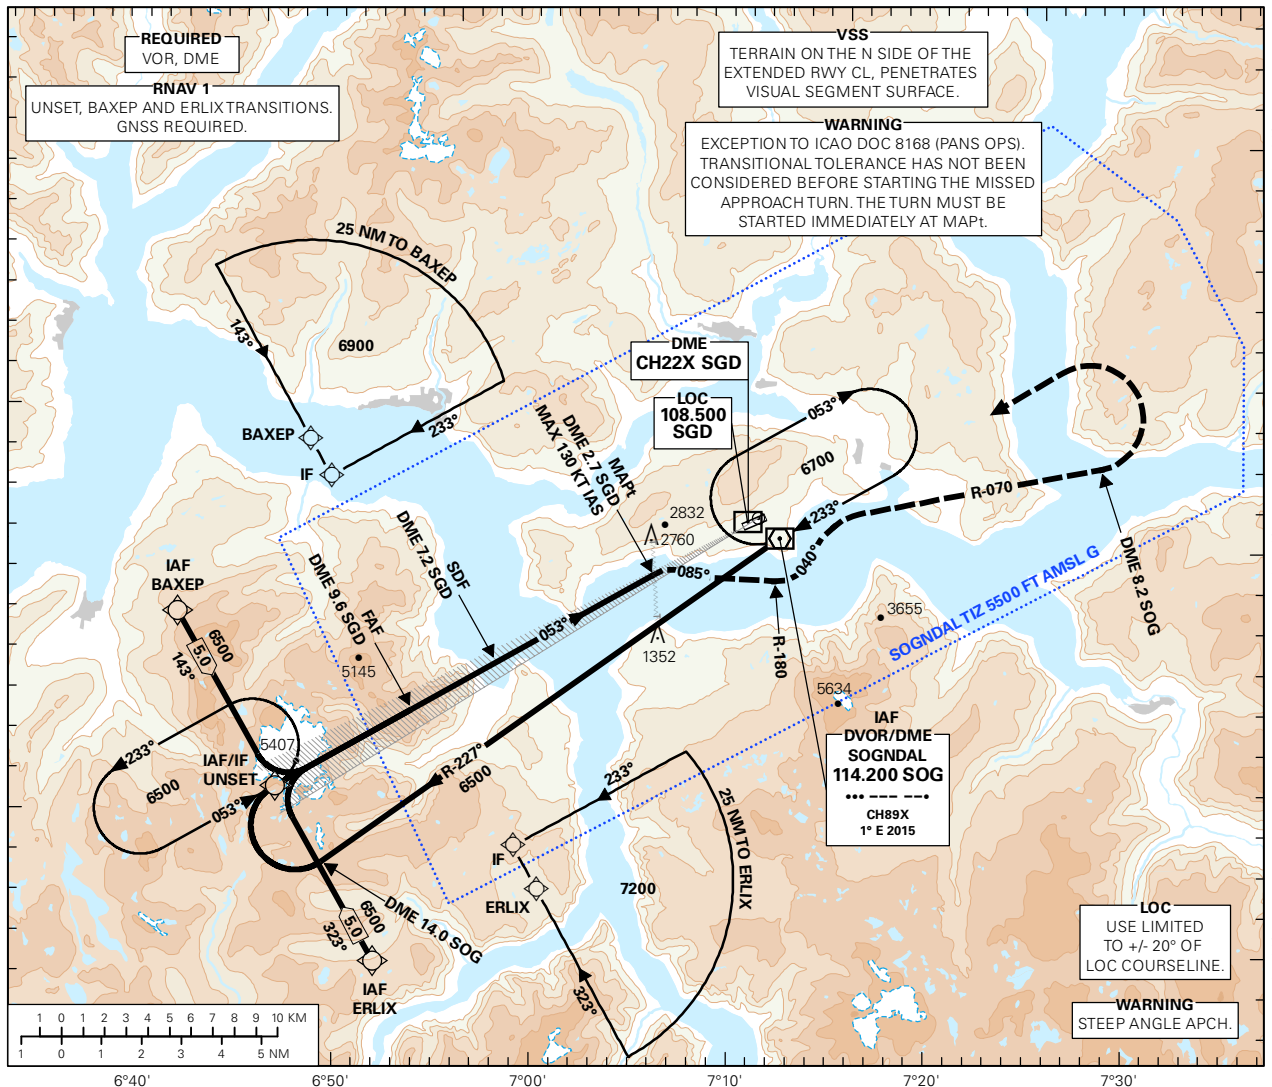

DIST TO SGD	10	9	8	7	6	5	4	3
ALT (HGT)	-	5370 (4114)	5270 (3654)	4810 (3194)	4360 (2744)	3900 (2284)	3440 (1824)	2990 (1374)

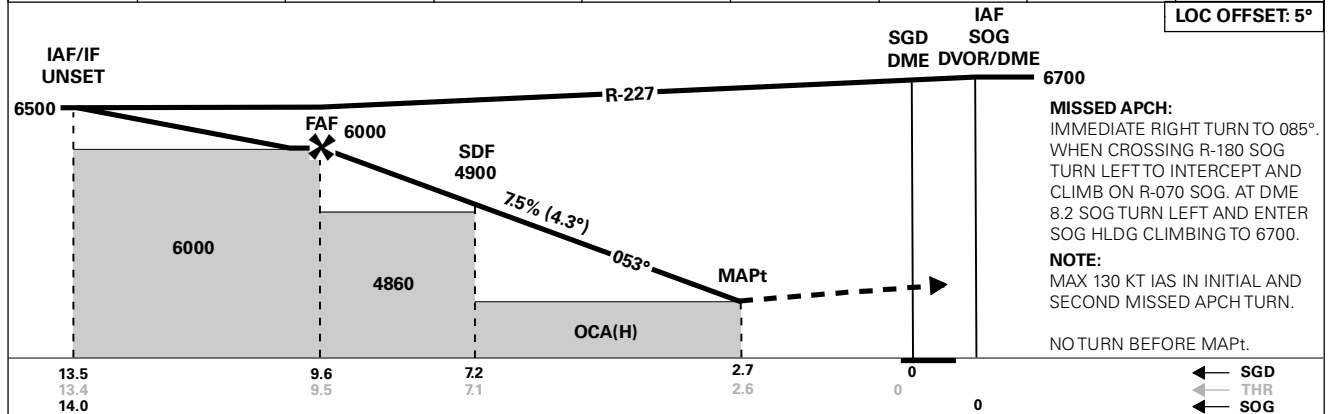

CAT OF ACFT	A	B	C	D	FINAL APCH	DIST FAF - MAPt: 6.9					
	LOC	2890 (1274)	-	-		SPEED	KT	70	90	100	120
STRAIGHT - IN					TIME	MIN:SEC	05:56	04:37	04:09	03:28	03:12
CIRCLING		2890 (1257)			ROD	FT/MIN	535	690	765	915	990

NOTE: CIRCLING S OF AD ONLY.

CHANGES: MSA.